

Space Requirements Dimensions (unit: mm)



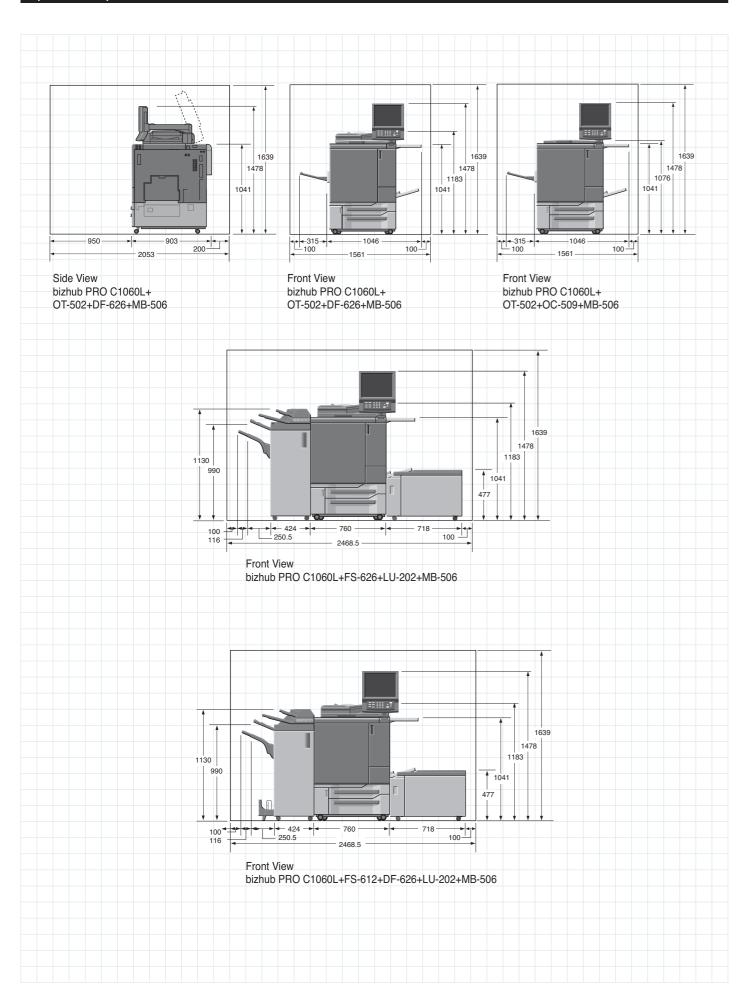

# bizhub PRO C1060L - Spec Sheet

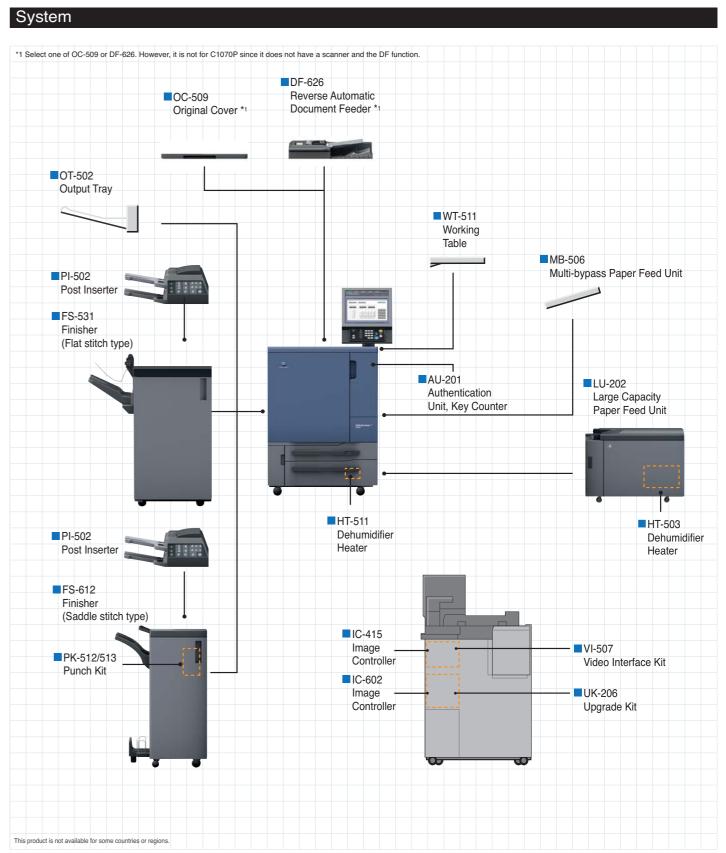

# Specifications

#### bizhub PRO C1060L General Specifications

Type		Console type
Copy Method		4-coupled drum tandem laser electrostatic method
Resolution Sc	an	600 dpi x 600 dpi
Pri	nt	1,200 dpi (Equivalent to 3,600 dpi) x 1200 dpi
Gradation		8-bit / 256 Gradation
CPU		Pentium G850 2.9 GHz
System memory capa	citv	6 GB
HDD		1.5 TB
Original Type		Sheet, Book, Solid object
Max. Original Size		A3 or 11x17
Max. Print Area		323 mm × 480 mm
Output Size		Standerd: SRA3, A3, B4, A4, B5, 13x19, 11x17, 8 1/2x14,
(S: Short Edge Feed	١	8 1/2x11, 5 1/2X8 1/2S
(O. Onor Lager coal	,	Tab paper (A4, 8 1/2x11)
		Max. 330 mm x 487 mm, Min. 140 mm x 182 mm
		Multi-bypass(Option): SRA3, A3, B4, A4, B5, 13x19, 11x17,
		8 1/2x14, 8 1/2x11, 5 1/2X8 1/2S
		Tab paper (A4, 8 1/2x11)
		Max. 330 mm x 487 mm, Min. 100 mm x 148 mm
Image Loss		Max. 4 mm or less for top edge, Max. 4.5 mm or less for bottom edge.
illage Loss		Max. 3.0 mm or less for right/left edges
Warm-Up Time		390 seconds or less
First Copy Out Time	Colour	7.6 seconds or less (A4, 8 1/2x11)
riist copy out time	Black and White	6.3 seconds or less (A4, 8 1/2x11)
Continuous Copy Spee		
Continuous Copy Spee	Black and White	61 sheets/min. (A4), 33 sheets/min. (A3)
Copy Magnification		61 sheets/min. (A4) Inch: x 1.000, x 2.000, x 1.545, x 1.294, x 1.214, x 0.785, x 0.772,
Copy Magrillication	rixed iviagrillication	
		x 0.647, x 0.500
	Zoom Mognification	Metric: x 1.000, x 2.000, x 1.414, x 1.189, x 0.840, x 0.707, x 0.500
T O't	Zoom Magnification	x 0.250 to x 4.000 (Each 0.001 step)
Tray Capacity	Standard	Tray 1 (500 sheets, 80 g/m²)
	0-4:	Tray 2 (1,000 sheets, 80 g/m²)
	Option	MB-506 (Multi-bypass, 250 sheets, 80 g/m²)*1 *2
D T		LU-202 (2,500 sheets x 80 g/m²)*1
Paper Type		Plain, Fine, Recycled paper, Color, Coated-GL, Coated-ML,
	le:	Coated-GO, Tab paper
Paper Weight	Standard	62 g/m² to 256 g/m² *3 (Plain, Fine, Colour Specific)
	0 11 (110)	81 g/m² to 256 g/m² *3 (Coated)
	Option(MB-506)	62 g/m² to 300 g/m²
Continuous Copy Count		Up to 9,999 sheets
Paper Capacity		150 sheets (80 g/m²) *4
Power Source		Inch: AC208 to 240V 21A 60 Hz
		Metric: AC220 to 240V 20A, 50 Hz / 60 Hz
Power Consumption		Inch: 4,900W or less (Main body only)
		Metric: 4,700W or less (Main body only)
Dimensions [W] x [D]	x [H]	760 mm*5 x 903 mm*6 x 1073 mm*7 / 29.92"*5 x 35.55"*6 x 42.24"*7
Dimensions [W] x [D] Main body + OC-506 Weight	x [H]	(Main body + Original Cover)  Approximately 291kg / 641 lb (Main body only)

- 11 MB-506, PF-602m, PF-707 and LU-202 are the options.

  12 PF-602m and PF-707 are not available when MB-506 is installed.

  13 For paper size A4 or smaller than 8 1/2 x 11, it is up to 216 g/m2

  14 The OT-502 is attached as an option.

  15 Excluding the control panel, output tray, work table.

  16 Including the rear duct.

  17 Height to the top of the original cover excluding the control panel.

#### bizhub PRO C1060L Printer Controller Image Controller IC-602

illiage controller 10-0	J02
Туре	AIO to the engine (Option)
CPU	Conforms with main unit specification
Memory	Max. 10 GB
	Details: 2 GB + 4 GB (Standard of the main body) + 4 GB (IC-602)
HDD	Max. 1.5 TB
	Details: 500 GB x 3 (Standard of the main body)
Page-description Language	Adobe PostScript3 (PS3019), PDF direct print (PDF version 1.7),
	TIFF direct print (TIFF version 6 compliance),
	PPML (version 2.2), PCL-5c compatible,
	PCL XL (PCL6 version 3) compatible
Printing Method	Pserver (IPX/SPX), LPD/LPR (TCP/IP), IPP (TCP/IP),
	AppleTalk (EtherTalk), Bonjour (TCP/IP), Web service printing (TCP/IP),
	NPrinter / RPrinter (IPX/SPX), Raw Port (TCP/IP), SMB
Applicable OS	PS Plug-in
	Windows XP / Server 2003 / Vista / Server 2008 / 7 / 8 / Server 2012*1
	MacOSX 10.5 / 10.6 / 10.7 / 10.8 (PPC/Intel)
	PS PPD*2
	Windows XP / Server 2003 / Vista / Server 2008 / 7 / 8 / Server 2012*1
	Linux CUPS
Interface	Ethernet (1000BASE-T / 100Base-TX / 10Base-T) with IPv6, USB
Scanner Resolution	200 / 300 / 400 / 600 dpi
Data Format	PDF, TIFF, JPEG, XPS
Driver	HDD Twain Driver, Real Time Mode Twain Driver
*1 Includes 64-hit	

#### Image Controller IC-415

Type	Embedded
CPU	Conforms with main unit specification
Memory	2 GB
HDD	500GB SATA
Page-description Language	Adobe PostScript3 (PS3019), (PDF 1.7), PCL 5/6 emulation
Printing Method	TCP/IP, SNMP, SMB, FTP, LPR, IPP, Bonjour
Applicable OS	Windows XP / Vista / 7 / 8 / Server 2003 / Server 2008*1
	MacOSX 10.5 / 10.6 / 10.7 / 10.8
Scanner Resolution	200 / 300 / 400 / 600 dpi
Data Format	PDF, TIFF, JPEG
Driver	Twain Plug-in

<sup>\*</sup> Includes 64-bit.

#### Options

#### ■ Reverse Automatic Document Feeder DF-626

Paper Type	1-sided	Simplex original mode: 35 g/m² to 210 g/m²
		Duplex original mode: 50 g/m <sup>2</sup> to 128 g/m <sup>2</sup>
	2-sided	Simplex original mode, Duplex original mode: 50 g/m² to 128 g/m²
Paper Size		A3, B4, A4, B5, A5, B6S, 11x17, 8 1/2x11
Capacity		100 sheets (80 g/m²)
Scan Speed (A4)		Scan Resolution: 600 dpi 42 sheets/min.
		Scan Resolution: 300 dpi 70 sheets/min.
Power Source		Supplied from the machine
Dimensions [W] x [D] x [H]		600 mm x 575 mm x 130 mm / 23.62" x 22.64" x 5.12"
Weight		Approximately 16.7 kg / 36.82 lb

#### ■ Multi bypass paper feed unit MB-506

Paper Weight	62 g/m² to 300 g/m²
Paper Size	Max. 330 mm x 487 mm, Min. 100 mm x 148 mm
Tray Capacity	250 sheets (80 g/m²)
Power Source	Supplied from the main body
Power Consumption	Max. 28W or less
Dimensions [W] x [D] x [H]	485 mm x 503 mm x 327 mm
	19.09" x 19.8" x 12.87"(Max. dimensions of the whole unit)
Weight	Approximately 4.2 kg / 9.26 lb

#### ■ Dehumidifier heater HT-511

Power Source	Supplied from the main body
Max. Power Consumption	40W or less
	240.6 mm x 124.1 mm x 7.8 mm / 9.47" x 4.89" x 0.31"
Weight	232.4 g / 0.51 lb

#### ■Large Capacity Unit LU-202

Paper Size	SRA3, A3, B4, A4, B5, 13x19, 12x18, 11x17, 9x11, 8 1/2x14, 8 1/2x11
(S: Short Edge Feed )	Tab paper (A4, 8 1/2x11)
(0. 0)	Max. 330 mm x 487 mm, Min. 210 mm x 182 mm*1
Applicable Paper	Plain paper, High quality paper, Coated paper: 62 g/m² to 300 g/m²*1
Paper Capacity	2,500 sheets (80 g/m²)*2
Power Source	Supplied both from the main body.
Max. Power Consumption	DC: 70W or less, AC: 50W or less (Not including HT-503)
Dimensions [W] × [D] × [H]	710 mm x 639 mm x 477 mm / 27.95" x 25.16" x 18.78"
Weight	Approximately 42 kg / 92.59 lb

 $<sup>^{\</sup>rm *1}$  Available types of paper weighing 300 g/m² are limited to specific types.  $^{\rm *2}$  Stacked height 275 mm

### ■ Dehumidifier heater HT-503

Power Source	Supplied from the main body
Max. Power Consumption	DC: 4W or less, AC: 290W or less
Dimensions [W] × [D] × [H]	Dehumidifier Fan Heater Unit: 293 mm x 82 mm x 197 mm / 7.76" x
	11.54" x 3.22"
	Power Source Unit: 121 mm x 80 mm x 160 mm// 4.76" x 6.3" x 3.15"
Weight	Dehumidifier Fan Heater Unit: 1.5 kg / 3.31 lb
	Power Supply Unit: 0.9 kg / 1.98 lb

#### ■Finisher FS-531

Paper Weight (Staple mode)		60 g/m² to 209 g/m²
Paper Size (Staple mode)		Max. 314 mm x 458 mm, Min. 182 mm x 148 mm
Paper Capacity (80 g/m²) Non-sort mode,		Max. 3,000 sheets (A4, B5, 8 1/2x11)
	Sort/group mode	
	Staple mode	•2 to 9: 100 sets (Direction: 150 mm to 417 mm) / 50 sets (Other)
		•10 to 20: 50 sets
		•21 to 30: 30 sets
		•31 to 40: 25 sets
		•41 to 50: 20 sets
Stapling mode Types	Corner Stapling	Parallel or diagonal depending on paper size
(Staple Position)	2 staplings	Center spreading 162 mm pitch
Power Source		Supplied from the main body.
Max. Power Consumpti	on	80W or less
Dimensions [W] x [D] x	[H]	424 mm* x 656 mm x 990 mm / 16.69"* x 25.82" x 39"
		Width including the primary (main) tray (with the edge closed):
		674.5 mm / 26.56"
		Width including the primary (main) tray (with the edge pulled out):
		790.5 mm / 31.12"
Weight		Approximately 60 kg / 132.28 lb
* Excluding the primary (ma	ain) trav	

## Specifications

#### ■Finisher FS-612

Paper Weight	Staple / Saddle Stitching / Half-Fold mode	60 g/m² to 105 g/m²
Paper Size	Staple mode	A3, B4, A4, B5, A5, 12x18, 11x17, 8 1/2x14, 8 1/2x11, 9 x 11
i apei oize	Staple mode	Tab paper*1 (A4. 8 1/2x11)
		Max. 314 mm x 458 mm. Min. 182 mm x 140 mm. 182 mm x 148 mm* <sup>2</sup>
	Saddle stitching mode	A3. B4. A4. 12x18. 11x17. 8 1/2x14. 8 1/2x11
	Caddic Stitoring mode	Max. 314 mm x 458 mm Min. 210 mm x 279mm
	Half-Fold mode	A3. B4. A4. 12x18. 11x17. 8 1/2x14. 8 1/2x11
		Max. 314 mm x 458mm. Min. 210 mm x 279 mm
	Tri-Folding mode	A4S, 8 1/2x11S
Paper Capacity	Non-sort mode,	Max. 2,500 sheets
(Main Tray)	Sort/group mode	A4, A4S, B5, 8 1/2x11
Paper Weight		1500 sheets
62 g/m² to 300 g/m²		SRA3 *1, A3, B4, 12x18, 11x17, 8 1/2x14
Paper Capacity	Saddle Stitching mode	Length in the sub scan direction: 299 mm or less: 15 sets with 5 sheets
(Booklet Tray)		Other than the above: 20 sets with 5 sheets
Paper Weight	Folding mode	Length in the sub scan direction: 299 mm or less: 25 sets with 3
62 g/m² to 105 g/m²		sheets folding
		Other than the above: 33 sets with 3 sheets folding
	Tri-folding mode	50 sets with 1 sheet folding
Paper Capacity(Su		Max. 100 sheets
Paper Weight 62 g	/m² to 300 g/m²	SRA3, A3, B4, A4, 13x19, 12x18, 11x17, 9x11, 8 1/2x14
Power Source		Supplied from the main body.
Max. Power Consu		80W or less
Dimensions [W] x [D] x [H]		424 mm*2 x 656 mm x 990 mm / 16.69"*2 x 25.83" x 39"
		Width including the primary (main) tray (with the edge closed):
		674.5 mm / 26.56"
		Width including the primary (main) tray (with the edge pulled out):
		790.5 mm / 31.12"
Weight		65kg / 143.3 lb

#### ■ Punch Kit PK-512/513

Type		FS-integrated type punching operation device for Finisher FS-531/FS-612
Hole Pitch		PK-512: 80 mm (2 holes / 4 holes), 108 mm (3 holes)
		PK-513: 21 mm, 70 mm, 21 mm (Swedish 4 holes)
Paper Weight		60 g/m² to 128g/m²
Paper Size	PK-512	2 holes: A3, B4, A4, B5, 11x17, 8 1/2x14, 8 1/2x11
(S: Short Edge Feed )		3/4 holes: A3, B4, A4, B5, 11x17, 8 1/2x11
	PK-513	A3, B4, A4, B5
Applicable Paper		Plain paper, High quality paper, Colour paper, Coated paper
		(Same as the main body)
Power Source		Supplied from the main body.
Max. Power Consumption		40W or less
Dimensions [W] x [D] x [H]		130 mm x 470 mm x 115 mm / 5.12" x 18.5" x 4.53"
Weight		Approximately 3 kg / 6.61 lb

#### ■ Post Inserter PI-502

Paper Type		Plain, Color, Special, Coated (50 g/m² to 300 g/m²)
Paper Size	Upper Tray	A4, B5, A5, 9x11, 8 1/2x11, 8 1/2x11S
	Lower Tray	SRA3, A3, B4, A4, B5, A5, 12x18, 11x17, 8 1/2x14, 8 1/2x11,
		8 1/2x11S
Paper Capacity (80 g/m²)		Max. 200 sheets
Power Source Dimensions [W] x [D] x [H] Weight		Supplied from Finisher FS-532
		511(W) x 620 (D) x 220(H) mm (20-1/4" x 24-1/2" x 8-3/4")
		Approx. 10.5 kg / 23-1/2 lb



<sup>\*1</sup> Includes 64-bit.
\*2 WHQL is not obtained for the PS PPD driver

<sup>\*1</sup> Non-sort mode only
\*2 Excluding the primary (main) tray